



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁷ : G01S 13/32</p>	<p>A1</p>	<p>(11) International Publication Number: WO 00/48018</p> <p>(43) International Publication Date: 17 August 2000 (17.08.00)</p>		
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; vertical-align: top; border: none;"> <p>(21) International Application Number: PCT/EP00/00990</p> <p>(22) International Filing Date: 8 February 2000 (08.02.00)</p> <p>(30) Priority Data: 99101695.7 8 February 1999 (08.02.99) EP</p> <p>(71) Applicant (for all designated States except US): SOCIÉTÉ EUROPEENNE DES SATELLITES S.A. [LU/LU]; L-6815 Château de Betzdorf (LU).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): HARLES, Guy [LU/LU]; 37, op der Sterz, L-5823 Fentange (LU). BETHSCHEIDER, Gerhard [DE/DE]; Wiesenweg 12, D-54441 Ayl (DE). SIEBERT, Peter [DE/DE]; Roemerstrasse 94, D-54332 Wasserliesch (DE).</p> <p>(74) Agents: HOFFMANN - EITLE et al.; Arabellastrasse 4, D-81925 München (DE).</p> </td> <td style="width: 50%; vertical-align: top; border: none;"> <p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p> </td> </tr> </table>			<p>(21) International Application Number: PCT/EP00/00990</p> <p>(22) International Filing Date: 8 February 2000 (08.02.00)</p> <p>(30) Priority Data: 99101695.7 8 February 1999 (08.02.99) EP</p> <p>(71) Applicant (for all designated States except US): SOCIÉTÉ EUROPEENNE DES SATELLITES S.A. [LU/LU]; L-6815 Château de Betzdorf (LU).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): HARLES, Guy [LU/LU]; 37, op der Sterz, L-5823 Fentange (LU). BETHSCHEIDER, Gerhard [DE/DE]; Wiesenweg 12, D-54441 Ayl (DE). SIEBERT, Peter [DE/DE]; Roemerstrasse 94, D-54332 Wasserliesch (DE).</p> <p>(74) Agents: HOFFMANN - EITLE et al.; Arabellastrasse 4, D-81925 München (DE).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>
<p>(21) International Application Number: PCT/EP00/00990</p> <p>(22) International Filing Date: 8 February 2000 (08.02.00)</p> <p>(30) Priority Data: 99101695.7 8 February 1999 (08.02.99) EP</p> <p>(71) Applicant (for all designated States except US): SOCIÉTÉ EUROPEENNE DES SATELLITES S.A. [LU/LU]; L-6815 Château de Betzdorf (LU).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): HARLES, Guy [LU/LU]; 37, op der Sterz, L-5823 Fentange (LU). BETHSCHEIDER, Gerhard [DE/DE]; Wiesenweg 12, D-54441 Ayl (DE). SIEBERT, Peter [DE/DE]; Roemerstrasse 94, D-54332 Wasserliesch (DE).</p> <p>(74) Agents: HOFFMANN - EITLE et al.; Arabellastrasse 4, D-81925 München (DE).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>			
<p>(54) Title: RANGING SYSTEM AND METHOD FOR SATELLITES</p> <div style="text-align: center; margin: 20px 0;"> </div>				
<p>(57) Abstract</p> <p>In a satellite ranging system predetermined bit sequence or group of bit sequence in a transport stream, which is a digital signal, are used to generate trigger signals on the basis of which the delay introduced into the transport stream by the travel path from a satellite ground station to the satellite and back or to another satellite ground station is determined allowing a calculation of the distance between the ground station(s) and the satellite. The predetermined bit sequence or group of bit sequences may be inserted into the transport stream at the uplink site, for example as a specific payload P. In order to avoid insertion of additional packets the transport stream or part of it may be used as a predetermined bit sequence.</p>				

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Ranging system and method for satellites

The present invention relates to ranging of satellites and more general to determining the distance and relative
5 velocity between a sender and a receiver of digitally modulated signals.

Geostationary communication satellites have to be positioned in precisely defined space segments assigned by the
10 International Telecommunication Union (ITU) to each satellite. Due to drift the position of a satellite may change and has to be corrected so that it becomes necessary to determine precisely the position and/or movement of the satellite usually addressed as ranging. When analogue signals
15 are send to and received from the satellite several ranging systems have to be used based on precise measurements of the time of travel of the analogue signals. For example, the vertical and/or horizontal synchronization pulses of television signals were used for measuring the travel time of
20 the analogue TV signal. Such signal markers are not available when digital signals are transmitted.

Ranging of satellites, as it should be understood for the purpose of understanding invention to be discussed further
25 below, stands for the task of determining the distance between a ground station and a satellite, especially a geostationary satellite. As an additional aspect, the ranging of satellites may be understood to also but not necessarily comprise the determination of the satellite velocity as the
30 availability of a velocity value provides additional options while determining the distance between the satellite and a ground station and/or controlling the position of the satellite.

It is therefore an object of the invention to provide a ranging system and method which is capable of measuring precisely the distance between a ground station and a satellite on the basis of a digitally modulated signal.

5

It is a further object of the invention to provide a ranging system which, additionally or separately, is capable of measuring the relative velocity between a ground station and a satellite on the basis of a digitally modulated signal.

10

The above object is achieved by a ranging system for determining ranging information of a satellite comprising a first receiving arrangement for receiving a transport stream signal suitable for being transmitted to the satellite and for outputting a first output signal; a second receiving arrangement for receiving said transport stream signal transmitted from the satellite and for outputting a second output signal; and processing means for receiving the first and second output signals of the first and second receiving arrangements, for tracing a predetermined signal pattern in said first and said second output signal and for determining the delay between the first and second output signals on the basis of said tracing of the signal pattern.

25 According to the invention the first and second receiving arrangements are identical regarding structure and components, i.e. regarding the influence upon the processed signal which for this reason can be assumed to be identically processed, at least with respect to time, in the first and
30 the second receiving arrangement.

Advantageously, the first and second receiving arrangement comprise a tuner, a demodulator and a decoder, the output signals generated by receiving arrangements being a decoded

digital signal. The structure and components of the first and second decoding arrangement are, therefore, identical so that the decoding arrangements introduce the same delay into signals.

5

It is an essential aspect of the invention to propose the use of identical decoding arrangements for decoding the non-delayed and the delayed digital transport stream signals. It has been found that using decoding arrangements of identical structure provides sufficient accuracy for performing precise ranging operations.

Alternatively, but nonetheless advantageously, the first and second receiving arrangements comprise a first and a second tuner, respectively, the output signals generated by said tuners being an analogue signal. The processing means comprise a first and a second processor for receiving the analogue output signals, respectively, for sampling the analogue output signals to obtain a first and a second series of sampled values and for outputting a first and a second trigger signal.

The processors should be understood to be either a microprocessor or microprocessor circuit with a suitable programming, a logic circuit or a similar device capable of performing the required task.

As the distance calculation is based on a time delay, said processing means further comprise a time measurement circuit for receiving said first trigger signal and said second trigger signal from said first and second processors and for measuring the time between said first and said second trigger signal.

Preferably, said processing means further comprise a clock circuit for providing time information to said first and second processors and/or to said time measurement circuit.

- 5 Especially for implementation at an uplink site, said first and second receiving arrangements are connected to a satellite antenna for transmitting a signal to said satellite and for receiving a signal from said satellite. Further, said first and second receiving arrangements, said first and
- 10 second processors, said time measurement circuit and said clock circuit are provided at a ground station further comprising a multiplexer/encoder receiving a plurality of digital payload signals and generating a digital transport stream signal, a modulator for modulating said digital
- 15 transport stream signal, such modulated digital transport stream signal being supplied to said first decoding arrangement, an upconverter for converting said digital transport stream signal into a signal suitable for being supplied to said satellite antenna and a downconverter for
- 20 receiving a signal from said satellite antenna and for supplying a modulated digital transport stream signal to said second decoding arrangement.

- As an alternative, said processing means may comprise a first
- 25 time measurement circuit for receiving said first trigger signal from said first processor and time information from a first clock circuit and a second time measurement circuit for receiving said second trigger signal from said second processor and time information from a second clock circuit,
- 30 wherein said second time measurement circuit transmits the received time information to said first time measurement circuit for measuring the time between said first and said second trigger signal.

5

Said first receiving arrangement may be connected to a first satellite antenna for transmitting a signal to said satellite and wherein said second receiving arrangement is connected to a second satellite antenna for receiving a signal from said satellite.

As two measurements are performed at different locations said first decoding arrangement, said first processor, said first time measurement circuit and said first clock circuit are provided at a first ground station further comprising a multiplexer/encoder receiving a plurality of digital payload signals and generating a digital transport stream signal, a modulator for modulating said digital transport stream signal, such modulated digital transport stream signal being supplied to said first decoding arrangement, and an upconverter for converting said digital transport stream signal into a signal suitable for being supplied to said first satellite antenna. Then, said second receiving arrangement, said second processor, said second time measurement circuit and said second clock circuit are provided at a second ground station further comprising a downconverter for receiving a signal from said second satellite antenna and for supplying a modulated digital transport stream signal to said second decoding arrangement.

The above object is also achieved by a ranging method comprising the steps of receiving a modulated digital signal, which is based on a digital transport stream, for example according to the MPEG-2 and/or DVB standards, and obtaining a first received digital signal; tracing a predetermined bit sequence or group of bit sequences in the first received digital signal and generating a first trigger signal upon detection of the predetermined bit sequence or group of bit sequences; receiving a delayed modulated digital signal,

which is based on said digital transport stream and which is delayed due to traveling along a transmission path, and obtaining a second received digital signal; tracing a predetermined bit sequence or group of bit sequences in the second received digital signal and to generate a second trigger signal upon detection of the predetermined bit sequence or group of bit sequences; and determining the delay on the basis of the first and second trigger signals.

10 The trigger signals are used to start and stop a timer in order to measure the time delay.

In a further step time stamp information is obtained from a suitable synchronized clocks and processed together with the delay.

In an alternative embodiment, first time stamp information is obtained upon detection of the predetermined bit sequence or group of bit sequences in the first received digital signal, second time stamp information is obtained upon detection of the predetermined bit sequence or group of bit sequences in the second received digital signal and the delay is determined on the basis of the first and second trigger signals as well as the first and second time stamp information. Again, it is essential to precisely synchronize the clock circuits providing the time stamp information.

An alternative method for determining ranging information of a satellite according to the invention comprises the steps of: receiving a modulated digital signal, which is based on a digital transport stream, for example according to the MPEG-2 and/or DVB standards, and obtaining a first received analogue signal; sampling the first received analogue signal and obtaining a first series of sampled values; tracing in said

7-

first series of sampled values a signal pattern caused by a predetermined bit sequence or group of bit sequences in the first received analogue signal and generating a first trigger signal upon detection of the predetermined signal pattern;
5 receiving a delayed modulated digital signal, which is based on said digital transport stream and which is delayed due to traveling along a transmission path, and obtaining a second received analogue signal; sampling the second received analogue signal and obtaining a second series of sampled
10 values; tracing in said second series of sampled values a signal pattern caused by a predetermined bit sequence or group of bit sequences in the second received analogue signal and to generate a second trigger signal upon detection of the predetermined signal pattern; and determining the delay on
15 the basis of the first and second trigger signals.

The above further object is achieved by a ranging system for measuring the relative velocity between a ground station and a satellite on the basis of a digitally modulated signal
20 comprising a reference timing means for driving a first digital counting means generating first counter values at a first frequency, a reading/inserting means for reading a momentary counter value of the digital counting means and for inserting said value into said digitally modulated signal, a
25 transmitting means transmitting said digitally modulated signal including the counter value to a satellite, a receiving means for receiving said digitally modulated signal including the counter value from said satellite, an extracting means for extracting the counter value from the
30 received signal, and a second digital counting means being controlled on the basis of said extracted counter value and generating second counter values at a second frequency, the velocity of the satellite being determined on the basis of the deviation between the first and second frequency.

In an advantageous embodiment the reference timing means is a clock. Further, additional timing means can be provided for driving said second digital counting means, especially if the
5 signal from the satellite is received at a remote receiving station. The ranging system according to the invention is especially suited for being used with a digitally modulated signal which is a digital data stream (DS), especially according to a standard like MPEG/DVB.

10

Further, the above second object is achieved by a method for measuring the relative velocity between a ground station and a satellite on the basis of a digitally modulated signal comprising the steps driving a first digital counting means
15 with a reference timing means, reading a momentary counter value of said first digital counter means generating first counter values at a first frequency, inserting said value into said digitally modulated signal, transmitting said digitally modulated signal including the counter value to a
20 satellite, receiving said digitally modulated signal including the counter value from said satellite, extracting the counter value from the received signal, controlling on the basis of said extracted counter value a second digital counting means generating second counter values at a second
25 frequency, and determining the velocity of the satellite on the basis of the deviation between said first frequency and second frequency.

For further details of preferred embodiments, reference is
30 made to claims.

In the following an embodiment of the invention will be described in greater detail and with reference to the drawings.

Fig. 1 shows a diagram of a transport stream according to the MPEG-2 standard.

5 Fig. 2 shows a first embodiment of a ranging system according to the invention.

Fig. 3 shows a second embodiment of a ranging system according to the invention.

10

Fig. 4 shows a third embodiment of a ranging system according to the invention.

15 Fig. 5 shows a fourth embodiment of a ranging system according to the invention.

Fig. 6 shows an additional aspect related to the ranging system according to the invention.

20 The process of broadcasting digital video, audio and data signals can be understood to be divided into two sub-processes. The first sub-process relates to the MPEG-2 standards and comprises the processing of elementary digital data streams, including data compression and stream
25 multiplexing, to generate a digital transport stream (TS) the format of which is shown in Fig. 1. The second subprocess deals with error correction schemes which are necessary to achieve a reliable transmission via transmission channels having low SIN ratios.

30

In Fig. 1 the structure of the MPEG-2 transport stream TS is shown. The transport stream TS is a sequence of packets basically consisting of a header H (4 Bytes) and a payload P (184 Bytes). The header H includes synchronization

10

information (1 Byte), various flags (transport error indicator, payload unit start indicator, transport priority, etc.), a payload identification PID (13 Bits) and a continuity counter (4 Bits). The payload identification PID is required for demultiplexing the individual elementary data streams. An adaptation field is optional but is transmitted at least every 0.1 s and contains ancillary program data especially a program reference clock PCR for regeneration of a 27 MHz clock at the receiving side.

10

Subsequently, the transport stream TS is processed according to different standards depending on the transmission channel. For transmission via satellites the European DVB satellite standard (DVB-S) may be applied defining inter alia convolutional and Reed-Solomon coding as well as additional error control bits to be added to allow forward error correction (FEC). Similarly, European DVB standards exist for terrestrial (DVB-T) and cable (DVB-C) broadcasting.

15

According to a first and second preferred embodiment of the invention a predetermined bit sequence or group of bit sequences in the transport stream TS, which is a digital signal, are used to generate trigger signals on the basis of which the delay introduced into the transport stream by the travel path from a satellite ground station to the satellite and back to the same or another satellite ground station is determined allowing a calculation of the distance between the ground station(s) and the satellite. The predetermined bit sequence or group of bit sequences may be inserted into the transport stream TS at the uplink site, for example as a specific payload P. In order to avoid insertion of additional packets the program identification PID or part of it may be used as a predetermined bit sequence. Some PIDs must be present in the transport stream TS but may have a repetition

20
25
30

rate which is too high for the purpose of determining ranging information. Then, the PID may be combined with other information of the transport stream header H, e.g. the continuity counter, in order to define a predetermined bit sequence or group of bit sequences.

According to the principles of the first and second preferred embodiment of the invention, receiving arrangements 7, 71 as shown in Fig. 2 and 3, receive a digital transport stream signal suitable for being transmitted to a satellite and output a first and a second digital output signal 0 and 0'. These signals are input into processing means 8, 8' which trace the predetermined bit sequence or group of bit sequences in said first and said second digital output signals and determine the delay between the first and second digital output signals on the basis of said tracing of the bit sequence or group of bit sequences. Each of the receiving arrangements 7, 71 comprises a tuner 71, 71', demodulator 72, 72', and a decoder 73, 73'. The processing means 8, 8' performs the tracing operation on bit level although the bit stream processed by the processing means 8, 81 may vary.

With reference to Fig. 2 further details of the first embodiment will be described. Fig. 2 shows a ground station 1 comprising a multiplexer/encoder 2, a QPSK modulator 3, an upconverter 4 and a satellite antenna 5. Digital payload signals 6-1 to 6-n are elementary data streams and are fed to a multiplexer/encoder 2 which converts the plurality of digital payload signals into a single digital transport stream, for example according to the MPEG-2 and DVB standards as described above with reference to Fig. 1. The digital transport stream is modulated by the QPSK modulator 3 and fed to the upconverter 4 which represents in Fig. 2 the equipment necessary to convert the output of the QPSK modulator 3 into

12

a signal that can be fed to the satellite antenna 5 for transmission to the satellite. Typically, such equipment comprises frequency converters, high power amplifiers etc.

5 The output signal of the QPSK modulator 3, i.e. the modulated digital transport stream is also fed to a first receiving/decoding arrangement 7 comprising a first tuner 71, a first QPSK demodulator 72 and a first decoder 73. The output signal of the first receiving/decoding arrangement 7
10 is a digital transport stream which can be processed on bit level. The digital output signal of the first receiving/decoding arrangement 7 is fed to a first processor 8 which analyses the digital output signal of said first receiving/decoding arrangement 7 to trace a predetermined bit
15 sequence or group of bit sequences in the digital output signal of the first receiving/decoding arrangement 7.

If the processor 8 traces the predetermined bit sequence or group of bit sequences in the digital output signal 0 of the
20 first receiving/decoding arrangement 7 it sends a start signal START to a time measurement circuit 9. Upon receipt of the start signal START the time measurement circuit 9 commences to measure the time until it receives a stop signal STOP.

25

The stop signal STOP is generated by a second processor 81 receiving a digital output signal 0 from a second receiving/decoding arrangement 7' which comprises a second tuner 71', a second QPSK demodulator 72' and a second decoder
30 73'. The first and second receiving/decoding arrangements 7 and 7' are identical regarding their structure and components. The input signal to the second receiving/decoding arrangement 71 is supplied from a downconverter 10 which receives a signal from the satellite antenna 5 and which

comprises all the equipment necessary to convert the received signal from the satellite antenna 5 into a signal corresponding to the output signal of the QPSK modulator 3. However, as the signal has traveled from the satellite antenna 5 to the satellite and back, the received signal is delayed. Apart from the delay the digital output signal 0 of the second decoding arrangement 71 is identical to the digital output signal of the first decoding arrangement 7 if receiving/decoding arrangements 7, 71 having identical structure and components are provided.

For generating the stop signal STOP the second processor 81 traces the predetermined bit sequence or group of bit sequences in the digital output signal 01 of the second receiving/decoding arrangement 7'. Upon detection of the predetermined bit sequence or group of bit sequences the second processor 8' sends the stop signal STOP to the time measurement circuit 9 which stops the time measurement. The measured time corresponds to the distance between the ground station 5 and the satellite.

As two identical receiving/decoding arrangements 7 and 71 are provided the measured time corresponds to the delay between the transmitted signal and the received signal introduced by the signal travel path from the satellite antenna to the satellite and back. Therefore, the distance between the ground station and the satellite can be determined on the basis of the measured time. Delays introduced by the components of the receiving/decoding arrangements can be neglected as the same delay is introduced by the first and by the second receiving/decoding arrangement. The influence of the upconverter 4 and of the downconverter 10 can be taken into account as the delay introduced thereby can easily be measured with other measurement equipment, i.e. is known.

In this first embodiment the uplink path and the downlink path are provided at a single ground station so that the signal is transmitted and received at the same location.

5 Therefore, there is no need for time synchronization with respect to distance measurements. When, however, two or more ground stations are used to determine the position of a satellite on the basis of individually measured distances it is necessary to synchronize the clocks at the ground stations
10 in order to ensure that the measurements are performed at almost the same time or that the moment of the individual measurement is known (time stamp information). Otherwise the satellite may have substantially changed its position when the time intervals between the individual measurements are
15 too large. However, in view of the maximum satellite velocity of approx. 2 m/s the accuracy needed is not very high. As described further below, the satellite velocity can also be determined and can be taken into account.

20 A sufficient synchronization is possible when clock circuits on the basis of the Global Positioning System GPS are used. But also other clock circuits providing a similar synchronization may be employed. In Fig. 2 a clock circuit 11 is shown which supplies time stamp information to the time
25 measurement circuit 9. The time stamp contains information regarding the time of the measurement so that a plurality of measurements at the same or at different locations can be taken into consideration in combination.

30 With reference to Fig. 3 details of the second embodiment of a ranging system according to the invention will be described. Fig. 3 shows a first ground station 1 which in many aspects is identical to the ground station of the first embodiment. Therefore, the same reference signs will be used

15

in the following. The first ground station 1 comprises a multiplexer/encoder 2, a QPSK modulator 3, an upconverter 4 and a first satellite antenna 5. Digital payload signals 6-1 to 6-n are elementary data streams and are fed to the
5 multiplexer/encoder 2 which converts the plurality of digital payload signals into a single digital transport stream, for example according to the MPEG-2 and DVB standards as described above with reference to Fig. 1. The digital transport stream is modulated by QPSK modulator 3 and fed to
10 upconverter 4 which represents in Fig. 3 the equipment necessary to convert the output of the QPSK modulator 3 into a signal that can be fed to satellite antenna 5 for transmission to the satellite. Typically, such equipment comprises frequency converters, high power amplifiers etc.

15

The output signal of the QPSK modulator 3, i.e. the modulated digital transport stream is also fed to a first receiving/decoding arrangement 7 comprising a first tuner 71, a first QPSK demodulator 72 and a first decoder 73. The
20 output signal 0 of the receiving/decoding arrangement 7 is a digital transport stream which can be processed on bit level. The digital output signal of the first decoding arrangement 7 is fed to a first processor 8 which analyses the digital output signal 0 of said first receiving/decoding arrangement
25 7 to trace a predetermined bit sequence or group of bit sequences in the digital output signal of the first receiving/decoding arrangement 7.

If the first processor 8 traces the predetermined bit
30 sequence or group of bit sequences in the digital output signal of the first receiving/decoding arrangement 7, it sends a first trigger signal EMISSION to a time measurement circuit 9. Upon receipt of the first trigger signal EMISSION the time measurement circuit 9 registers the time stamp

16

information (the emission time) supplied by a first clock circuit 11 at this instant.

Furthermore, Fig. 3 shows an second ground station 12
5 comprising a second satellite antenna 13 and a downconverter 101 which receives a signal from the second satellite antenna 13 and which comprises all the equipment necessary to convert the received signal from the satellite antenna 13 into a
10 signal corresponding to the output signal of the QPSK modulator 3. However, as the signal has traveled from the first satellite antenna 5 via the satellite to the second satellite antenna 13, the received signal is delayed.

The output signal of the downconverter 10' is supplied to a
15 second receiving/decoding arrangement 7' which comprises a second tuner 71', a second QPSK demodulator 72' and a second decoder 73'. The first and second receiving/decoding arrangements 7 and 7' are identical regarding their structure and components, i.e. regarding their influences upon the
20 processed signal. The output signal 0' of the second receiving/decoding arrangement 7' is a digital signal and, apart from the delay, is identical to the digital output signal 0 of the first decoding arrangement 7.

25 The second processor 8' receives the digital output signal 0' of the second receiving/decoding arrangement 7' and traces the predetermined bit sequence or group of bit sequences. Upon detection of the predetermined bit sequence or group of bit sequences the second processor 8' sends a second trigger
30 signal RECEPTION to a time measurement circuit 9' which registers the time stamp information supplied (the reception time) by a second clock circuit 111 at this instant.

In the second embodiment, the second time measurement circuit 9' transmits the time stamp information (the reception time) to the first time measurement circuit 9 which calculates the signal delay on the basis of the time stamp information received from the second time measurement circuit 9' and the time stamp information (the emission time) previously registered by the first time measurement circuit 9.

As two identical receiving/decoding arrangements 7 and 7' are provided the difference between the time stamps corresponds to the delay between the transmitted signal and the received signal introduced by the signal travel path from the first satellite antenna 5 via the satellite to the second satellite antenna 13. Delays introduced by the components of the receiving/decoding arrangements can be neglected as the same delay is introduced by the first and by the second receiving/decoding arrangement. The influence of the upconverter 4 and of the downconverter 10' can be taken into account as the delay introduced thereby can easily be measured with other measurement equipment, i.e. is known.

In this embodiment the uplink path and the downlink path are provided between the satellite and two separate ground stations so that the signal is transmitted and received at different locations. Therefore, it is necessary to synchronize the clock circuits 11 and 11'. Only if clock circuits 11 and 11' synchronized with high precision are used at the first and second ground station 1 and 12 the delay can be determined on the basis of the time stamp information.

30

The above described ranging systems carry out a ranging method comprising the following basic steps. In a first step a modulated digital signal, which is based on a digital transport stream, for example according to the MPEG-2 and/or

DVB standards, is received and decoded to obtain a first received digital signal. In a second step a predetermined bit sequence or group of bit sequences is traced in the first received digital signal and a first trigger signal is
5 generated upon detection of the predetermined bit sequence or group of bit sequences. In a third step, which may at least partially be carried out in parallel to the first step, a delayed modulated digital signal, which is based on a digital transport stream, for example according to the MPEG-2 and/or
10 DVB standards, and which is delayed due to traveling along a transmission path, is received and decoded to obtain a second received digital signal. In a fourth step a predetermined bit sequence or group of bit sequences is traced in the second received digital signal and a second trigger signal is
15 generated upon detection of the predetermined bit sequence or group of bit sequences. In a fifth step the delay is determined on the basis of the first and second trigger signal. The trigger signals are used to start and stop a timer, respectively, in order to measure the time delay.

20

In a further step time stamp information is obtained from a suitable clock and processed together with the delay. Thereby, delays determined at different locations can be combined and evaluated relative to each other as the time
25 stamp allows to use delay values measured at the same time. Synchronized clock circuits are necessary in this respect.

The ranging method according to the invention can be carried out at different locations of which one may be an uplink site
30 of a satellite broadcasting system and another one may be reception site of said broadcasting system. Then, first time stamp information is obtained upon detection of the predetermined bit sequence or group of bit sequences in the first received digital signal, second time stamp information

is obtained upon detection of the predetermined bit sequence or group of bit sequences in the second received digital signal and the delay is determined on the basis of the first and second trigger signals as well as the first and second
5 time stamp information. It is essential to precisely synchronize the clock circuits providing the time stamp information.

According to a third and fourth preferred embodiment of the
10 invention a predetermined signal pattern in the modulated transport stream, which is a analogue signal, is used to generate trigger signals on the basis of which the delay introduced into the transport stream by the travel path from a satellite ground station to the satellite and back to the
15 same or another satellite ground station is determined allowing a calculation of the distance between the ground station(s) and the satellite. According to a first aspect, the predetermined signal pattern is caused by a bit sequence or group of bit sequences inserted into the transport stream
20 TS at the uplink site, for example as a specific payload P. According to second aspect, the predetermined signal pattern is obtained merely by sampling the modulated digital transport stream, i.e. the analogue signal. Thereby, the insertion of additional packets into the transport stream can
25 be avoided.

According to the principles of the third and fourth preferred embodiment of the invention, receiving arrangements 7, 7', basically consisting of a tuner as shown in Fig. 4 and 5,
30 receive a modulated digital transport stream signal suitable for being transmitted to a satellite and output a first and a second output signal. These signals are input into processing means 8, 8' which sample the output signals to obtain and store a series of sampled values. Further, the processors are

arranged to trace a predetermined signal pattern in the series of samples of the first and said second output signals and to determine the delay between the first and second digital output signals on the basis of said tracing

5 operation, which may also be understood as a correlating or matching process. The processing means 8, 8' performs the tracing operation on bit level as series of sampled values have been obtained and preferably stored.

10 With reference to Fig. 4 further details of the third embodiment will be described. Fig. 4 shows an first ground station 1 which corresponds in some aspects to the ground station of the first and second embodiments. Therefore, the same reference signs will be used in the following. As shown
15 in Fig. 4 a ground station 1 comprises a multiplexer/encoder 2, a QPSK modulator 3, an upconverter 4 and a satellite antenna 5. Digital payload signals 6-1 to 6-n are elementary data streams and are fed to a multiplexer/encoder 2 which converts the plurality of digital payload signals into a
20 single digital transport stream, for example according to the MPEG-2 and DVB standards as described above with reference to Fig. 1. The digital transport stream is modulated by the QPSK modulator 3 and fed to the upconverter 4 which represents in Fig. 4 the equipment necessary to convert the output of the
25 QPSK modulator 3 into a signal that can be fed to the satellite antenna 5 for transmission to the satellite. Typically, such equipment comprises frequency converters, high power amplifiers etc.

30 The output signal of the QPSK modulator 3, i.e. the modulated digital transport stream is also fed to a first receiving arrangement 7 which consists of a first tuner 700. The output signal of the first tuner 700 (receiving arrangement 7) is an analogue signal which can be processed and which corresponds

to the digital transport stream. The output signal of the first tuner 700 is fed to a first processor 8 which samples the analogue signal to obtain and store a series of digital values representing the output signal of the tuner 700.

5

If the ranging operation is based on a signal pattern caused by a predetermined bit sequence or group of bit sequences the sampling and storing operation of processor 8 is carried out in an appropriate time relationship with the time of
10 insertion or occurrence of the predetermined bit sequence or group of bit sequences into the digital transport stream. For example, the sampling operation should be started prior to the insertion or occurrence of the predetermined bit sequence or group of bit sequences but not too early in order to avoid
15 an unnecessarily high number of samples. Thereby, the hardware requirements can be kept within a reasonable range. The sampling operation should not start delayed with respect to the expected signal pattern since in this case the analysis, which will be described further below, may be
20 difficult if not impossible.

The processor 8 analyses the series of samples of the output signal of said first tuner and compares it with a series of values determined on the basis of the predetermined bit
25 sequence or group of bit sequences and the processing which takes place in the multiplexer/encoder 2 and the QPSK modulator 3. Thereby, the processor 8 indirectly traces the predetermined bit sequence or group of bit sequences in the output signal of the first tuner 700. In other words, the
30 processor traces a predetermined signal pattern in the tuner output signal.

If the predetermined signal pattern is traced, the first processor 8 sends a start signal START to a time measurement

circuit 9. Upon receipt of the start signal START the time measurement circuit 9 begins to measure the time until it receives a stop signal STOP.

5 The stop signal STOP is generated by a second processor 81 receiving an output signal from a second receiving arrangement 7' which consists of a second tuner 700'. The first and second tuner 700 and 700' are identical regarding their structure and components. The input signal to the
10 second tuner 700' is supplied from a downconverter 10 which receives a signal from the satellite antenna 5 and which comprises all the equipment necessary to convert the received signal from the satellite antenna 5 into a signal corresponding to the output signal of the QPSK modulator 3.
15 However, as the signal has traveled from the satellite antenna 5 to the satellite and back, the received signal is delayed. Apart from the delay the output signal of the second tuner 700' is, for the purposes of the invention, identical to the output signal of the first tuner 700.

20

For generating the stop signal STOP the second processor 8' traces the predetermined bit sequence or group of bit sequences, i.e. the predetermined signal pattern, in the output signal of the second tuner 700' in the same manner as
25 the first processor 8. Upon detection of the predetermined bit sequence or group of bit sequences the second processor 8' sends the stop signal STOP to the time measurement circuit 9 which stops the time measurement. The measured time corresponds to the distance between the ground station 5 and
30 the satellite.

As two identical receiving arrangements 7 and 7', i.e. the first and second tuner 700 and 700', are provided the measured time corresponds to the delay between the

transmitted signal and the received signal introduced by the signal travel path from the satellite antenna to the satellite and back. Therefore, the distance between the ground station and the satellite can be determined on the basis of the measured time. Delays introduced by the components of the tuners can be neglected as the same delay is introduced by the first and by the second tuner. The influence of the upconverter 4 and of the downconverter 10 can be taken into account as the delay introduced thereby can easily be measured with other measurement equipment, i.e. is known.

As described above, the processors 8 and 8' are arranged to determine a signal pattern in the tuner output signal based on a predetermined bit sequence or group of bit sequences and the known processing in the multiplexer/encoder 2 and the QPSK modulator 3. Alternatively, the first processor 8 may be set up to start the sampling/storing operation at any time to obtain a series of stored values corresponding to the first tuner output signal during the sampling/storing operation. Similarly, the second processor 8' may be set up to start the sampling/storing operation at a corresponding time to obtain a series of stored values corresponding to the second tuner output signal during the sampling/storing operation. The stored sample value series are compared to trace a match or correlation which is indicative of the time delay introduced into the signal by the traveling to the satellite and back. It should be noted that the storage requirements in the second processor 8' may be reduced if the sampling/storing operation is started only after a time which is almost equal but less than the expected delay of the signal. This alternative of the third embodiment also allows to combine the first and second processor into a single processing means avoiding the need for a time measurement circuit 9 since the

delay can be determined on the basis of the sampling frequency used in the sampling operation.

In this embodiment the uplink path and the downlink path are
5 provided at a single ground station so that the signal is transmitted and received at the same location. Therefore, there is no need for time synchronization with respect to distance measurements. When, however, two or more ground stations are used to determine the position of a satellite on
10 the basis of individually measured distances it is necessary to synchronize the clocks at the ground stations in order to ensure that the measurements are performed at almost the same time or that the moment of the individual measurement is known (time stamp information). Otherwise the satellite may
15 have substantially changed its position when the time intervals between the individual measurements are too large. However, in view of the maximum satellite velocity of approx. 2 m/s the accuracy needed is not too high. As described further below, the satellite velocity can also be determined
20 and can be taken into account.

As mentioned before, a sufficient synchronization is possible when clock circuits on the basis of the Global Positioning System GPS are used. But also other clock circuits providing
25 a similar synchronization may be employed. In Fig. 4 a clock circuit 11 is shown which supplies time stamp information to the time measurement circuit 9. The time stamp contains information regarding the time of the measurement so that a plurality of measurements at the same or at different
30 locations can be taken into consideration in combination.

With reference to Fig. 5 a fourth embodiment of a ranging system according to the invention will be described. Fig. 5 shows a first ground station 1 which in many aspects is

25

identical to the ground station of the third embodiment. Therefore, the same reference signs will be used in the following. The first ground station 1 comprises a multiplexer/encoder 2, a QPSK modulator 3, an upconverter 4
5 and a first satellite antenna 5. Digital payload signals 6-1 to 6-n are elementary data streams and are fed to the multiplexer/encoder 2 which converts the plurality of digital payload signals into a single digital transport stream, for example according to the MPEG-2 and DVB standards as
10 described above with reference to Fig. 1. The digital transport stream is modulated by QPSK modulator 3 and fed to upconverter 4 which represents in Fig. 5 the equipment necessary to convert the output of the QPSK modulator 3 into a signal that can be fed to satellite antenna 5 for
15 transmission to the satellite. Typically, such equipment comprises frequency converters, high power amplifiers etc.

The output signal of the QPSK modulator 3, i.e. the modulated digital transport stream is also fed to a first receiving
20 arrangement 7 which consists of a first tuner 700. The output signal of the first tuner 700 (receiving arrangement 7) is an analogue signal which can be processed and which corresponds to the digital transport stream. The output signal of the first tuner 700 is fed to a first processor 8 which samples
25 the analogue signal to obtain and store a series of digital values representing the output signal of the tuner 700.

If the ranging operation is based on a signal pattern caused by a predetermined bit sequence or group of bit sequences the
30 sampling and storing operation of processor 8 is carried out in an appropriate time relationship with the time of insertion or occurrence of the predetermined bit sequence or group of bit sequences into the digital transport stream as mentioned above with respect to the third embodiment.

The processor 8 analyses the series of samples of the output signal of said first tuner and compares it with a series of values determined on the basis of the predetermined bit
5 sequence or group of bit sequences and the way the signals are processed by the multiplexer/encoder 2 and the QPSK modulator 3. Thereby, the processor 8 indirectly traces the predetermined bit sequence or group of bit sequences in the output signal of the first tuner 700. In other words, the
10 processor traces a predetermined signal pattern in the tuner output signal.

If the processor 8 traces the predetermined bit sequence or group of bit sequences in the tuner output signal it sends a
15 first trigger signal EMISSION to a time measurement circuit 9. Upon receipt of the first trigger signal EMISSION the time measurement circuit 9 registers the time stamp information (the emission time) supplied by a first clock circuit 11 at this instant.

20 Furthermore, Fig. 5 shows an second ground station 12 comprising a second satellite antenna 13 and a downconverter 10' which receives a signal from the second satellite antenna 13 and which comprises all the equipment necessary to convert
25 the received signal from the satellite antenna 13 into a signal corresponding to the output signal of the QPSK modulator 3. However, as the signal has travelled from the first satellite antenna 5 via the satellite to the second satellite antenna 13, the received signal is delayed.

30 The output signal of the downconverter 10' is supplied to a second receiving arrangement 7' which consists of a second tuner 700'. The first and second tuners 700 and 700' are identical regarding their structure and components, i.e.

regarding their influences upon the processed signal. The output signal of the second tuner 700' is an analogue signal and, apart from the delay, corresponds to the output signal of the first tuner 700.

5

The second processor 8' receives the output signal of the second tuner 700' and traces the predetermined bit sequence or group of bit sequences, i.e. the corresponding signal pattern. Upon detection of the predetermined bit sequence or group of bit sequences the second processor 8' sends a second trigger signal RECEPTION to a time measurement circuit 9' which registers the time stamp information supplied (the reception time) by a second clock circuit 11' at this instant.

15

In the fourth embodiment, the second time measurement circuit 9' transmits the time stamp information (the reception time) to the first time measurement circuit 9 which calculates the signal delay on the basis of the time stamp information received from the second time measurement circuit 9' and the time stamp information (the emission time) previously registered by the first time measurement circuit 9.

As two identical tuners are provided the difference between the time stamps corresponds to the delay between the transmitted signal and the received signal introduced by the signal travel path from the first satellite antenna 5 via the satellite to the second satellite antenna 13. Delays introduced by the components of the tuners can be neglected as the same delay is introduced by the first and by the second tuner. The influence of the upconverter 4 and of the downconverter 10' can also be neglected as the delay introduced thereby is minimal.

In this embodiment the uplink path and the downlink path are provided between the satellite and two separate ground stations so that the signal is transmitted and received at different locations. Therefore, it is necessary to

5 synchronize the clock circuits 11 and 11'. Only if clock circuits 11 and 11' synchronized with high precision are used at the first and second ground station 1 and 12 the delay can be determined on the basis of the time stamp information.

10 The above described ranging systems of the third and fourth embodiment of the invention carry out a ranging method comprising the following basic steps. In a first step a modulated digital signal, which is based on a digital transport stream, for example according to the MPEG-2 and/or

15 DVB standards, is received and sampled to obtain a first series of sampled values of the modulated digital signal. In a second step a signal pattern corresponding to a predetermined bit sequence or group of bit sequences is traced in the first series of sampled values and a first

20 trigger signal is generated upon detection of the signal pattern. In a third step, which may at least partially be carried out in parallel to the first step, a delayed modulated digital signal, which is based on a digital transport stream, for example according to the MPEG-2 and/or

25 DVB standards, and which is delayed due to traveling along a transmission path, is received and sampled to obtain a second series of sampled values of the received modulated digital signal. In a fourth step a signal pattern corresponding to the predetermined bit sequence or group of bit sequences is

30 traced in the second series of sampled values and a second trigger signal is generated upon detection of the signal pattern. In a fifth step the delay is determined on the basis of the first and second trigger signal. The trigger signals

are used to start and stop a timer, respectively, in order to measure the time delay.

In a further step time stamp information is obtained from a
5 suitable clock and processed together with the delay.
Thereby, if required, delays determined at different
locations can be combined and evaluated relative to each
other as the time stamp allows to use delay values measured
at the same time. Synchronized clock circuits are necessary
10 in this respect.

The ranging method according to the invention can be carried
out at different locations of which one may be an uplink site
of a satellite broadcasting system and another one may be
15 reception site of said broadcasting system. Then, first time
stamp information is obtained upon detection of the signal
pattern in the first tuner output signal, second time stamp
information is obtained upon detection of the signal pattern
in the second tuner output signal and the delay is determined
20 on the basis of the first and second trigger signals as well
as the first and second time stamp information. It is
essential to precisely synchronize the clock circuits
providing the time stamp information.

25 The invention may also be carried out by providing receiving
means which comprise of a tuner and a demodulator. The output
signal of such receiving means, i.e. the output signal(s) of
the demodulator, for example the I and Q signals of a QPSK
demodulator, is then fed to processing means which are
30 adapted to trace a signal pattern in the demodulated signal.
Therefore the above description of two basic alternative
embodiments can be understood by those skilled in the art to
describe also details of a ranging system having receiving
means comprising a tuner and a demodulator.

Further, those skilled in the art will appreciate that it is advantageous to have available also information concerning velocity of a satellite in order to perform ranging

5 measurements and/or position control of satellite. Therefore, a system and method for measuring the relative velocity of a satellite will be described which may be used separately but which is especially suitable for being used in combination with anyone of the systems and methods described above.

10

With reference to Fig. 6 a ranging system according to this aspect of the invention which is capable of measuring the relative velocity between a ground station and a satellite on the basis of a digitally modulated signal will be described
15 in the following. A reference station 100 comprises a reference timing means 101, for example a clock, which drives a digital counting means 102. In predetermined, preferably regular time intervals a reading/inserting means 103 reads the momentary value CNT of the digital counting means 102 and
20 inserts the value into a digital data stream DS. The digital data stream DS including the counter value CNT is transmitted to a satellite 104 by transmitting means 105 of the reference station 100. The satellite 104 retransmits the digital data stream DS including the counter value CNT to be received by
25 either the reference station 100 or any other receiving station 106 both of which being provided with respective receiving means 107, 107'.

In the reference station 100 and/or the receiving station 106
30 an extracting means 108, 108' is provided which extracts the counter value CNT from the received signal, i.e. separates the counter values CNT from the digital data stream DS. The extracted (separated) counter value CNT is used to control a replica counting means 109 in the reference station 100

and/or a replica counting means 1091 in the receiving station 106. An additional timing means, for example a clock, (not shown in Fig.6) may be used for supplying a driving signal to the replica counter means 109, 109' such that the extracted
5 (separated) counter value CNT is sufficient for controlling the replica counter means 109, 109' at the times when the counter value CNT is extracted (separated) from the received signal, i.e. digital data stream DS. In the case of the ground station 100 the reference timing means 101 may be used
10 instead of an additional timing means. This approach is advantageous as no further clock synchronization is required since a single clock is used. In the case of the receiving station 106 additional timing means should be provided.

15 The frequency of the replica counting means 109, 109' differs from the frequency of the digital counting means 102 in the reference station due to the Doppler shift caused by the satellite motion relative to the reference station 100 and the receiving station 106, respectively. The frequency
20 deviation can be determined at the reference station 100 and/or the receiving station 106 and the velocity of the satellite can be calculated.

With respect to the receiving station 106 it should be noted
25 that it requires precise frequency synchronization with the reference station 100, either directly (counting means 102) or via a common frequency standard, in order to determine the velocity of the spacecraft with the desired precision. Alternatively, a reference timing means may be provided also
30 at the receiving station 106, which timing means drives a digital counting means also provided at the receiving station. Then, the timing means at the ground station 100 and at the receiving station 106 need to be synchronized. The means and methods for synchronizing clocks at remote locations

described above can be used also in the case of determining the relative velocity of a spacecraft. Therefore reference is made to the above description and an additional description is omitted.

5

In a MPEG/DVB system the clock of the reference station provides a stable 27 MHz reference frequency clock with low phase noise. The clock values are converted and distributed according to the MPEG standard time stamp mechanism (PCR).

10 Based on the received time stamps either the reference station 100 or the receiving station 106 can reconstruct the 27 MHz clock influenced by the motion of the satellite.

Typical Doppler shift for geostationary satellites are in the
15 range of 0.1 to 0.5 Hz.

Claims

1. Ranging system for determining ranging information of a receiver/transmitter in a communication channel,
5 especially of a satellite comprising
- a first receiving arrangement (7) for receiving a transport stream signal suitable for being transmitted to said satellite and for generating a first output
10 signal;
- a second receiving arrangement (7') for receiving a transport stream signal transmitted from said satellite and for generating a second output signal; and
15
- processing means (8, 8') for receiving said first and second output signals of said first and second receiving arrangements (7, 7'), for tracing a predetermined signal pattern in said first and said second output signal and
20 for determining the delay between the first and second output signals on the basis of said tracing of the signal pattern.
2. Ranging system according claim 1, wherein said first
25 receiving arrangement (7) comprises a first tuner (71), a first demodulator (72) and a first decoder (73), said first output signal generated by said first receiving arrangement (7) being a decoded digital signal, and wherein said second receiving arrangement (7') comprises
30 a second tuner (71'), a second demodulator (72') and a second decoder (73'), said second output signal generated by said second receiving arrangement (7') being a decoded digital signal.

3. Ranging system according to claim 2, wherein said processing means comprise a first processor (8) for receiving said first decoded digital output signal and for outputting a first trigger signal (START, EMISSION)
5 and a second processor (8') for receiving said second decoded digital output signal and for outputting a second trigger signal (STOP, RECEPTION).
4. Ranging system according to claim 3 wherein said
10 processing means further comprise a time measurement circuit (9) for receiving said first trigger signal (START) and said second trigger signal (STOP) from said first and second processors (8, 8') and for measuring the time between said first and said second trigger
15 signal (START, STOP).
5. Ranging system according to claims 3 or 4 wherein said processing means further comprise a clock circuit (11) for providing time information to said first and second
20 processors (8, 8') and/or to said time measurement circuit (9).
6. Ranging system according to anyone of claims 2 to 5 wherein said first and second receiving arrangements (7, 7') are connected to a satellite antenna (5) for
25 transmitting a signal to said satellite and for receiving a signal from said satellite.
7. Ranging system according to claim 6, wherein said first
30 and second receiving arrangements (7, 7'), said first and second processors (8, 8'), said time measurement circuit (9) and said clock circuit (11) are provided at a ground station (1) further comprising a multiplexer/encoder (2) receiving a plurality of digital

35

payload signals (6-1 ... 6-n) and generating a digital transport stream signal (DVB), a modulator for modulating said digital transport stream signal (DVB), such modulated digital transport stream signal being supplied to said first decoding arrangement (7), an upconverter (4) for converting said digital transport stream signal (DVB) into a signal suitable for being supplied to said satellite antenna (5) and a downconverter (10) for receiving a signal from said satellite antenna (5) and for supplying a modulated digital transport stream signal to said second decoding arrangement (7').

8. Ranging system according to claim 3, wherein said processing means further comprise a first time measurement circuit (9) for receiving said first trigger signal (EMISSION) from said first processor (8) and time information from a first clock circuit (11) and a second time measurement circuit (9') for receiving said second trigger signal (RECEPTION) from said second processor (8') and time information from a second clock circuit (11'), wherein said second time measurement circuit (9') transmits the received time information to said first time measurement circuit (9) for measuring the time between said first and said second trigger signal (EMISSION, RECEPTION).

9. Ranging system according to claim 8, wherein said first receiving arrangement (7) is connected to a first satellite antenna (5) for transmitting a signal to said satellite and wherein said second receiving arrangement (7') is connected to a second satellite antenna (13) for receiving a signal from said satellite.

10. Ranging system according to claim 9, wherein said first receiving arrangement (7), said first processor (8), said first time measurement circuit (9) and said first clock circuit (11) are provided at a first ground station (1) further comprising a multiplexer/encoder (2) receiving a plurality of digital payload signals (6-1 ... 6-n) and generating a digital transport stream signal (DVB), a modulator for modulating said digital transport stream signal (DVB), such modulated digital transport stream signal being supplied to said first decoding arrangement (7), and an upconverter (4) for converting said modulated digital transport stream signal (DVB) into a signal suitable for being supplied to said first satellite antenna (5).
11. Ranging system according to claim 9 or 10, wherein said second receiving arrangement (7'), said second processor (8'), said second time measurement circuit (9') and said second clock circuit (11') are provided at a second ground station (12) further comprising a downconverter (10') for receiving a signal from said second satellite antenna (13) and for supplying a modulated digital transport stream signal to said second decoding arrangement (7').
12. Method for determining ranging information of a receiver/transmitter in a communication channel, especially of a satellite comprising the steps of:
- receiving a modulated digital signal, which is based on a digital transport stream, for example according to the MPEG-2 and/or DVB standards, and obtaining a first received digital signal;

tracing a predetermined bit sequence or group of
bit sequences in the first received digital signal and
generating a first trigger signal upon detection of the
predetermined bit sequence or group of bit sequences;

5

receiving a delayed modulated digital signal, which
is based on said digital transport stream and which is
delayed due to traveling along a transmission path,
and obtaining a second received digital signal;

10

tracing a predetermined bit sequence or group of
bit sequences in the second received digital signal and
to generate a second trigger signal upon detection of
the predetermined bit sequence or group of bit

15

sequences; and

determining the delay on the basis of the first and
second trigger signals.

20 13. Method according to claim 12, further comprising the
steps of starting a time measurement on the basis of the
first trigger signal and stopping the time measurement
on the basis of the second trigger signal.

25 14. Method according to claim 12 or 13, further comprising
the step of obtaining time stamp information and
processing the delay together with the time stamp
information.

30 15. Method according to claim 12, further comprising the
steps of: obtaining first time stamp information upon
detection of the predetermined bit sequence or group of
bit sequences in the first received digital signal;
obtaining second time stamp information upon detection

38

of the predetermined bit sequence or group of bit sequences in the second received digital signal; and determining the delay on the basis of the first and second trigger signals and the first and second time stamp information.

5

16. Method according to anyone of claims 12 to 15, further comprising the step of synchronizing clock circuits providing the time stamp information.

10

17. Method according to anyone of claims 12 to 16, wherein the first and second received digital signals are regenerated digital transport streams.

15 18. Ranging system according claim 1, wherein said first receiving arrangement (7) comprises a first tuner (700), said first output signal generated by said first tuner (700) being an analogue signal, and wherein said second receiving arrangement (7') comprises a second tuner (700'), said second output signal generated by said second tuner (700') being an analogue signal.

20

19. Ranging system according to claim 19, wherein said processing means comprise a first processor (8) for receiving said first analogue output signal, for sampling said first analogue output signal to obtain a first series of sampled values and for outputting a first trigger signal (START, EMISSION) and a second processor (8') for receiving said second analogue output signal, for sampling said second analogue output signal to obtain a second series of sampled values and for outputting a second trigger signal (STOP, RECEPTION).

25

30

20. Ranging system according to claim 19 wherein said processing means further comprise a time measurement circuit (9) for receiving said first trigger signal (START) and said second trigger signal (STOP) from said first and second processors (8, 8') and for measuring the time between said first and said second trigger signal (START, STOP).
21. Ranging system according to claims 19 or 20 wherein said processing means further comprise a clock circuit (11) for providing time information to said first and second processors (8, 8') and/or to said time measurement circuit (9).
22. Ranging system according to anyone of claims 19 or 21 wherein said first and second receiving arrangements (7, 7') are connected to a satellite antenna (5) for transmitting a signal to said satellite and for receiving a signal from said satellite.
23. Ranging system according to claim 22, wherein said first and second receiving arrangements (7, 7'), said first and second processors (8, 8'), said time measurement circuit (9) and said clock circuit (11) are provided at a ground station (1) further comprising a multiplexer/encoder (2) receiving a plurality of digital payload signals (6-1 ... 6-n) and generating a digital transport stream signal (DVB), a modulator for modulating said digital transport stream signal (DVB), such modulated digital transport stream signal being supplied to said first decoding arrangement (7), an upconverter (4) for converting said digital transport stream signal (DVB) into a signal suitable for being supplied to said satellite antenna (5) and a

downconverter (10) for receiving a signal from said satellite antenna (5) and for supplying a modulated digital transport stream signal to said second decoding arrangement (7').

5

24. Ranging system according to claim 19, wherein said processing means further comprise a first time measurement circuit (9) for receiving said first trigger signal (EMISSION) from said first processor (8) and time information from a first clock circuit (11) and a second time measurement circuit (9') for receiving said second trigger signal (RECEPTION) from said second processor (8') and time information from a second clock circuit (11'), wherein said second time measurement circuit (9') transmits the received time information to said first time measurement circuit (9) for measuring the time between said first and said second trigger signal (EMISSION, RECEPTION).

20 25. Ranging system according to claim 24, wherein said first receiving arrangement (7) is connected to a first satellite antenna (5) for transmitting a signal to said satellite and wherein said second receiving arrangement (7') is connected to a second satellite antenna (13) for receiving a signal from said satellite.

26. Ranging system according to claim 25, wherein said first receiving arrangement (7), said first processor (8), said first time measurement circuit (9) and said first clock circuit (11) are provided at a first ground station (1) further comprising a multiplexer/encoder (2) receiving a plurality of digital payload signals (6-1 ... 6-n) and generating a digital transport stream signal (DVB), a modulator for modulating said digital

30

41

transport stream signal (DVB), such modulated digital transport stream signal being supplied to said first decoding arrangement (7), and an upconverter (4) for converting said modulated digital transport stream signal (DVB) into a signal suitable for being supplied to said first satellite antenna (5).

27. Ranging system according to claim 25 or 26, wherein said second receiving arrangement (7'), said second processor (8'), said second time measurement circuit (9') and said second clock circuit (11') are provided at a second ground station (12) further comprising a downconverter (10') for receiving a signal from said second satellite antenna (13) and for supplying a modulated digital transport stream signal to said second decoding arrangement (7').

28. Method for determining ranging information of a receiver/transmitter in a communication channel, especially of a satellite comprising the steps of:

receiving a modulated digital signal, which is based on a digital transport stream, for example according to the MPEG-2 and/or DVB standards, and obtaining a first received analogue signal;

sampling the first received analogue signal and obtaining a first series of sampled values; tracing in said first series of sampled values a signal pattern caused by a predetermined bit sequence or group of bit sequences in the first received analogue signal and generating a first trigger signal upon detection of the predetermined signal pattern; receiving a delayed modulated digital signal, which is based on said digital

transport stream and which is delayed due to traveling along a transmission path, and obtaining a second received analogue signal;

5 sampling the second received analogue signal and obtaining a second series of sampled values; tracing in said second series of sampled values a signal pattern caused by a predetermined bit sequence or group of bit sequences in the second received analogue signal and to
10 generate a second trigger signal upon detection of the predetermined signal pattern; and

 determining the delay on the basis of the first and second trigger signals.

15

29. Method according to claim 28, further comprising the steps of starting a time measurement on the basis of the first trigger signal and stopping the time measurement on the basis of the second trigger signal.

20

30. Method according to claim 28 or 29, further comprising the step of obtaining time stamp information and processing the delay together with the time stamp information.

25

31. Method according to claim 28, further comprising the steps of:

30 obtaining first time stamp information upon detection of the predetermined signal pattern in the first series of sampled values of the first received analogue signal; obtaining second time stamp information upon detection of the predetermined signal pattern in the second series

43

of sampled values of the second received analogue signal; and


determining the delay on the basis of the first and second trigger signals and the first and second time stamp information.


32. Method according to anyone of claims 28 to 31, further comprising the step of synchronizing clock circuits providing the time stamp information.
33. Ranging system for measuring the relative velocity between two stations of a communication channel, especially between a ground station and a satellite on the basis of a digitally modulated signal comprising a reference timing means (101) for driving a first digital counting means (102) generating first counter values at a first frequency, a reading/inserting means (103) for reading a momentary counter value (CNT) of the digital counting means and for inserting said value into said digitally modulated signal (DS), a transmitting means (105) transmitting said digitally modulated signal (DS) including the counter value (CNT) to a satellite (104), a receiving means (107, 107') for receiving said digitally modulated signal (DS) including the counter value (CNT) from said satellite (104), an extracting means (108, 108') for extracting the counter value (CNT) from the received signal, and a second digital counting means (109, 109') being controlled on the basis of said extracted counter value (CNT) and generating second counter values at a second frequency, the velocity of the satellite being determined on the basis of the deviation between the first and second frequency.

34. Ranging system according to claim 33, wherein said reference timing means is a clock (101).
35. Ranging system according to claim 33 or 34, wherein
5 additional timing means are provided for driving said second digital counting means (109, 109').
36. Ranging system according to any one of claims 33 to 35,
10 wherein said digitally modulated signal is a digital data stream (DS), especially according to a standard like MPEG/DVB.
37. Method for measuring the relative velocity between a ground station and a satellite on the basis of a
15 digitally modulated signal comprising the steps driving a first digital counting means (102) with a reference timing means (101), reading a momentary counter value (CNT) of said first digital counter means (102) generating first counter values at a first frequency,
20 inserting said value into said digitally modulated signal (DS), transmitting said digitally modulated signal (DS) including the counter value (CNT) to a satellite (104), receiving said digitally modulated signal (DS) including the counter value (CNT) from said
25 satellite (104), extracting the counter value (CNT) from the received signal, controlling on the basis of said extracted counter value (CNT) a second digital counting means (109, 109') generating second counter values at a second frequency, and determining the velocity of the
30 satellite on the basis of the deviation between said first frequency and second frequency.

1/6


FIG.1

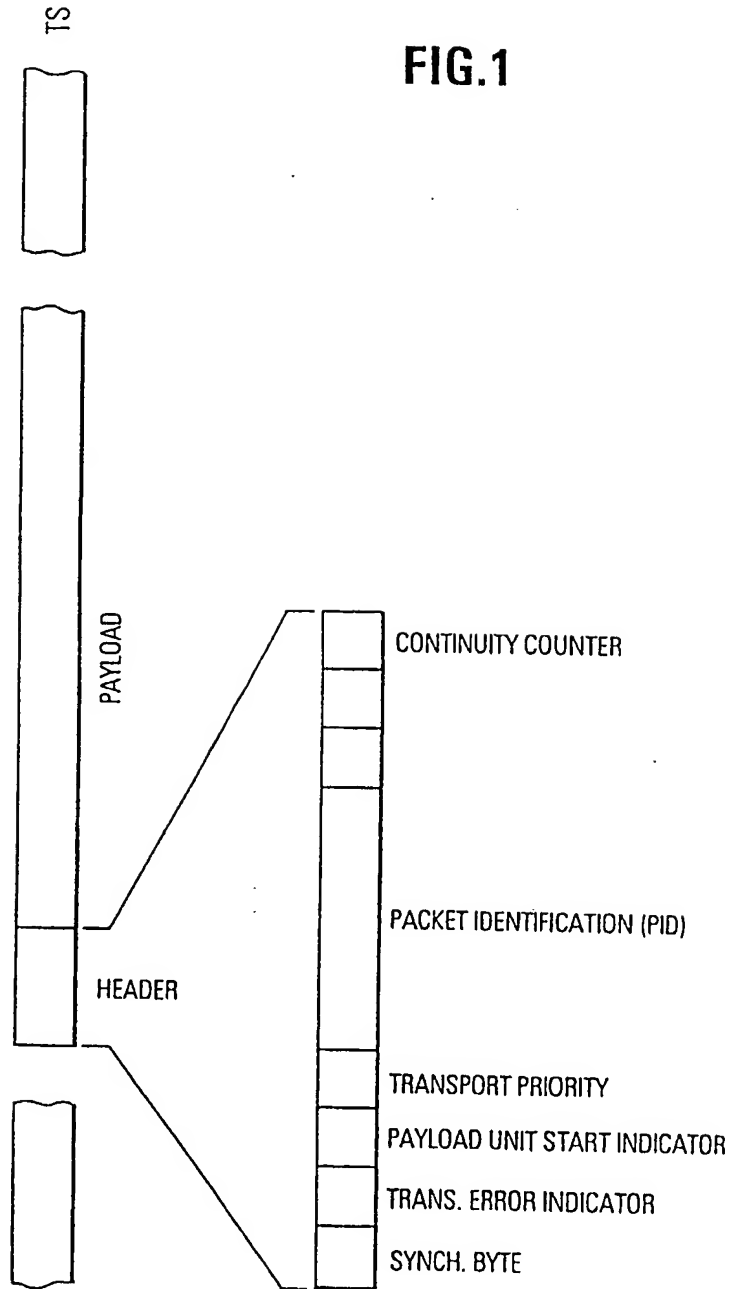

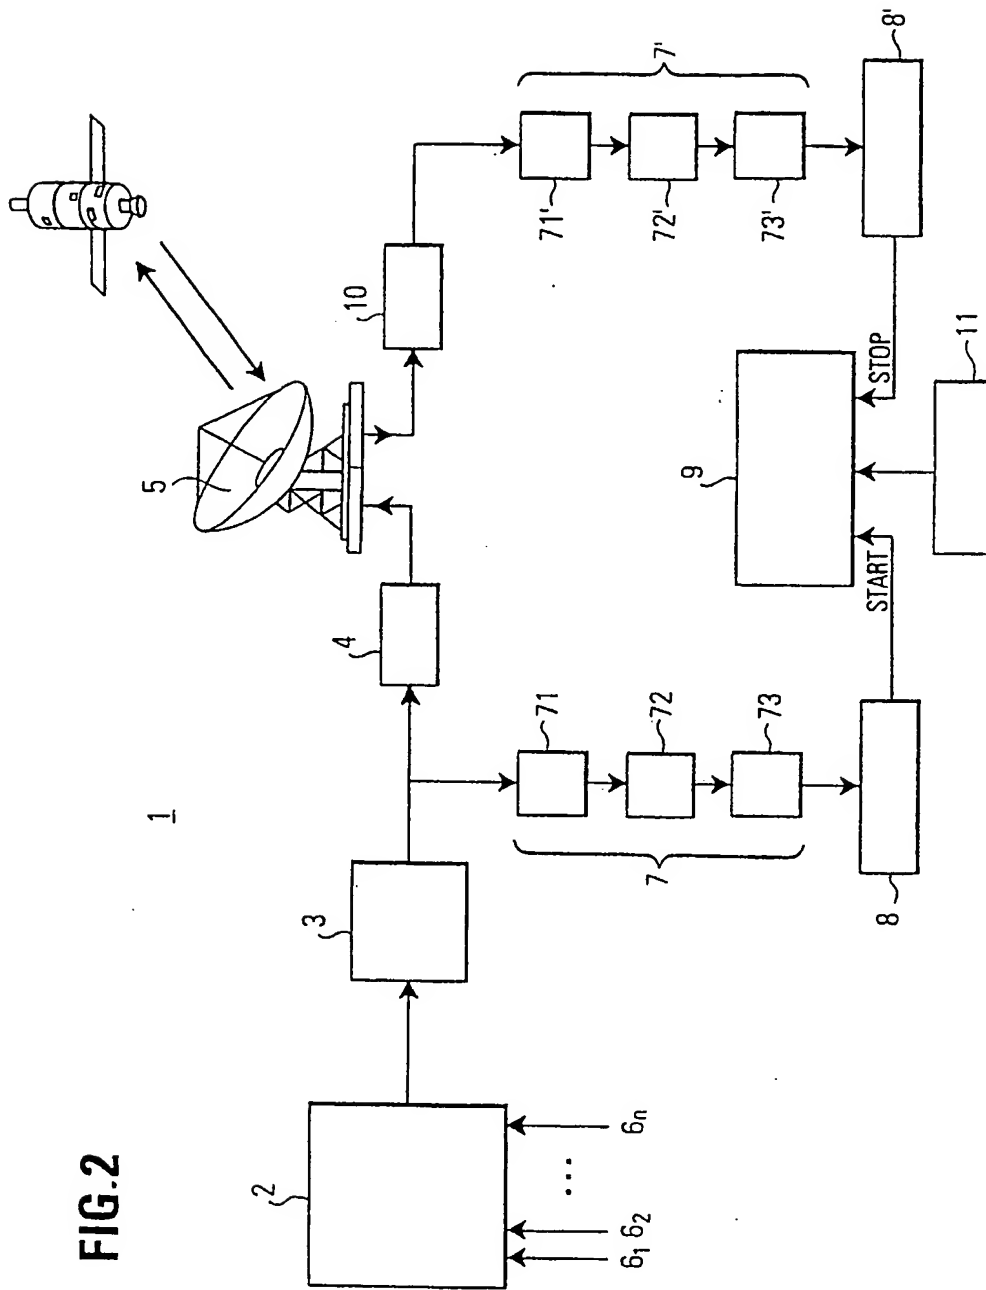

3/6

FIG.3

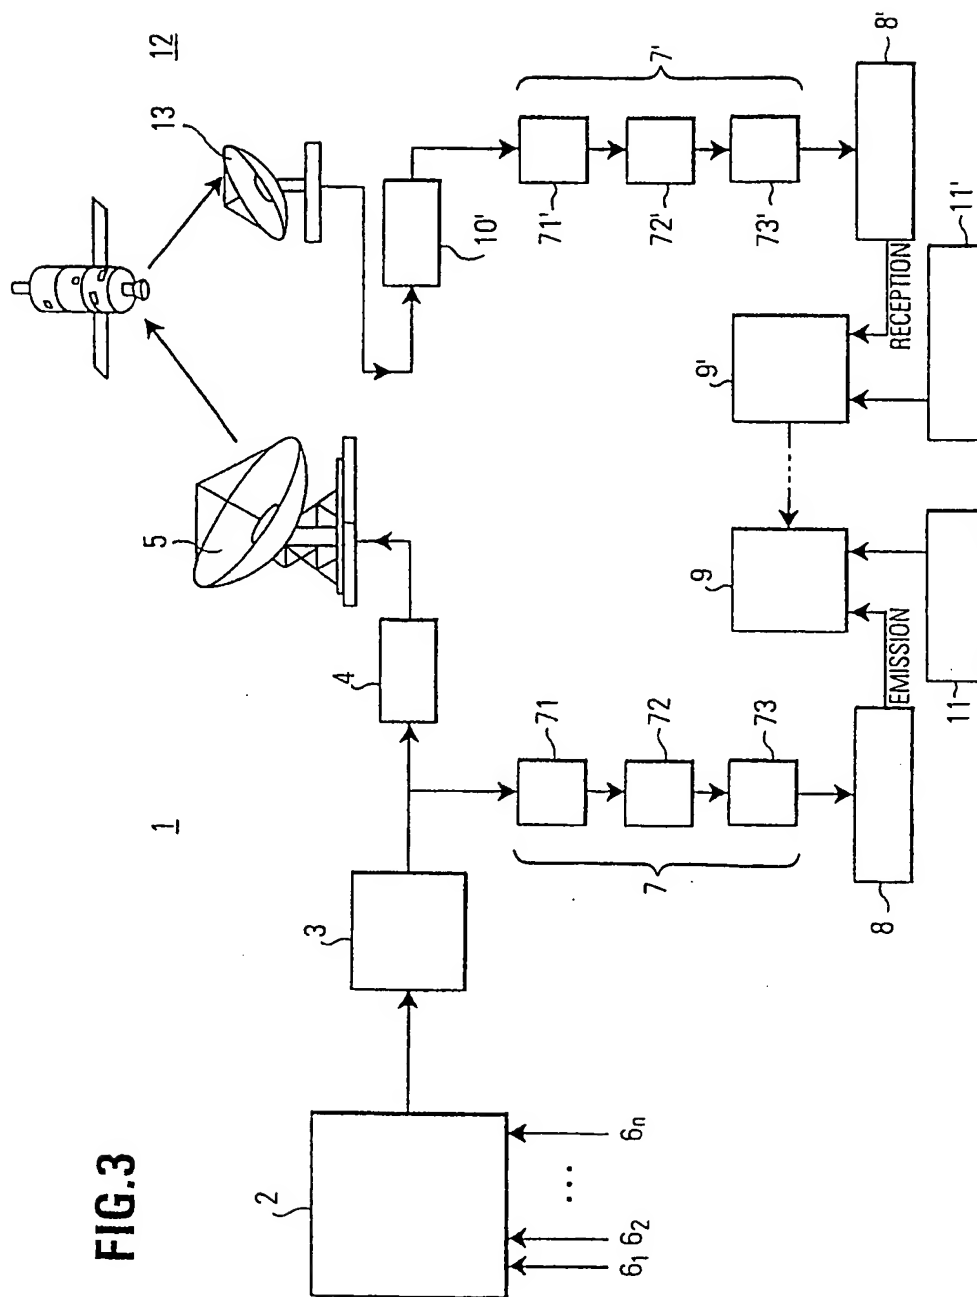

4/6

FIG.4



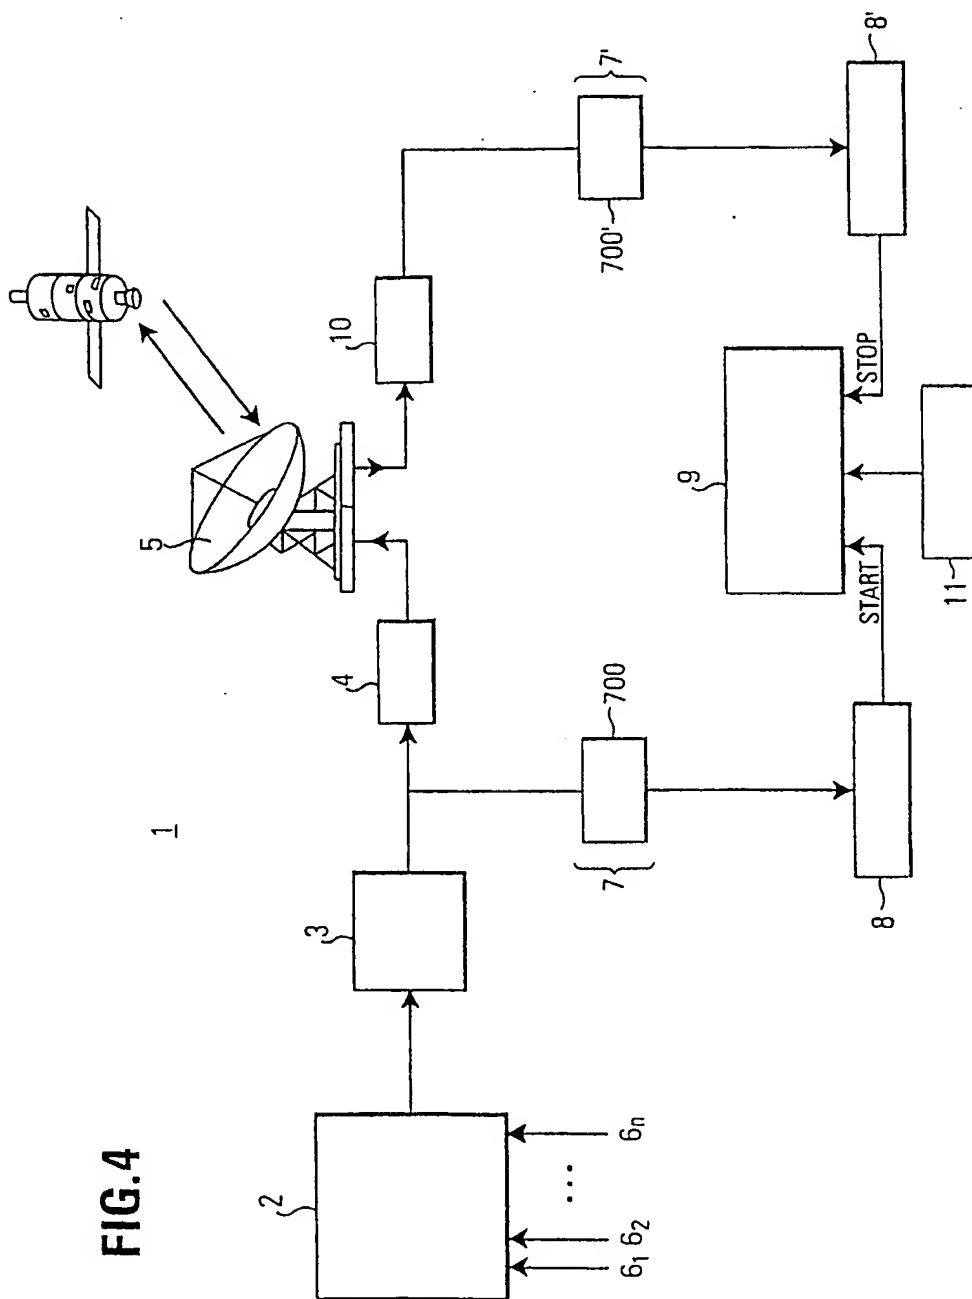


FIG. 5

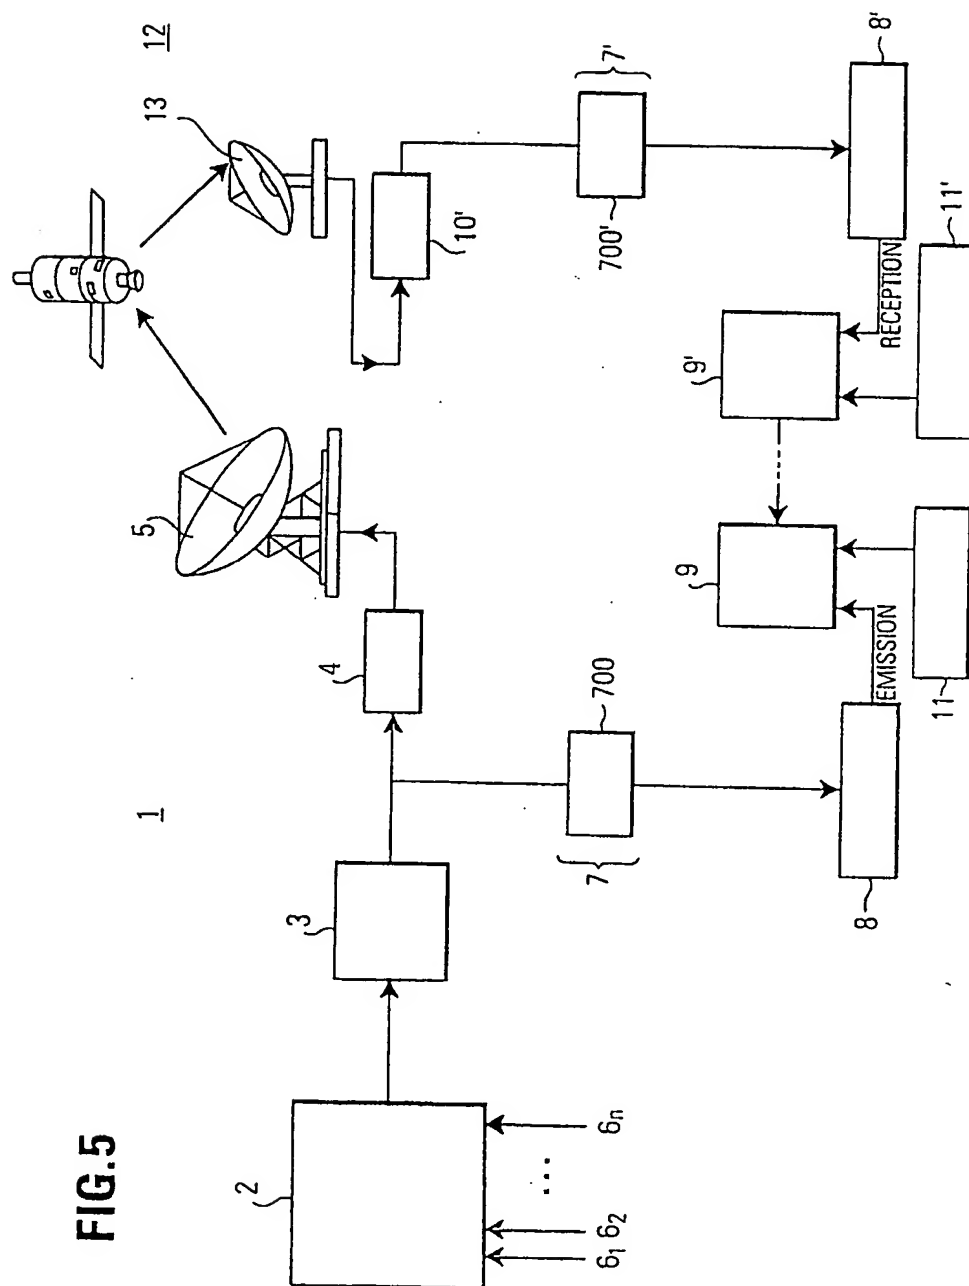

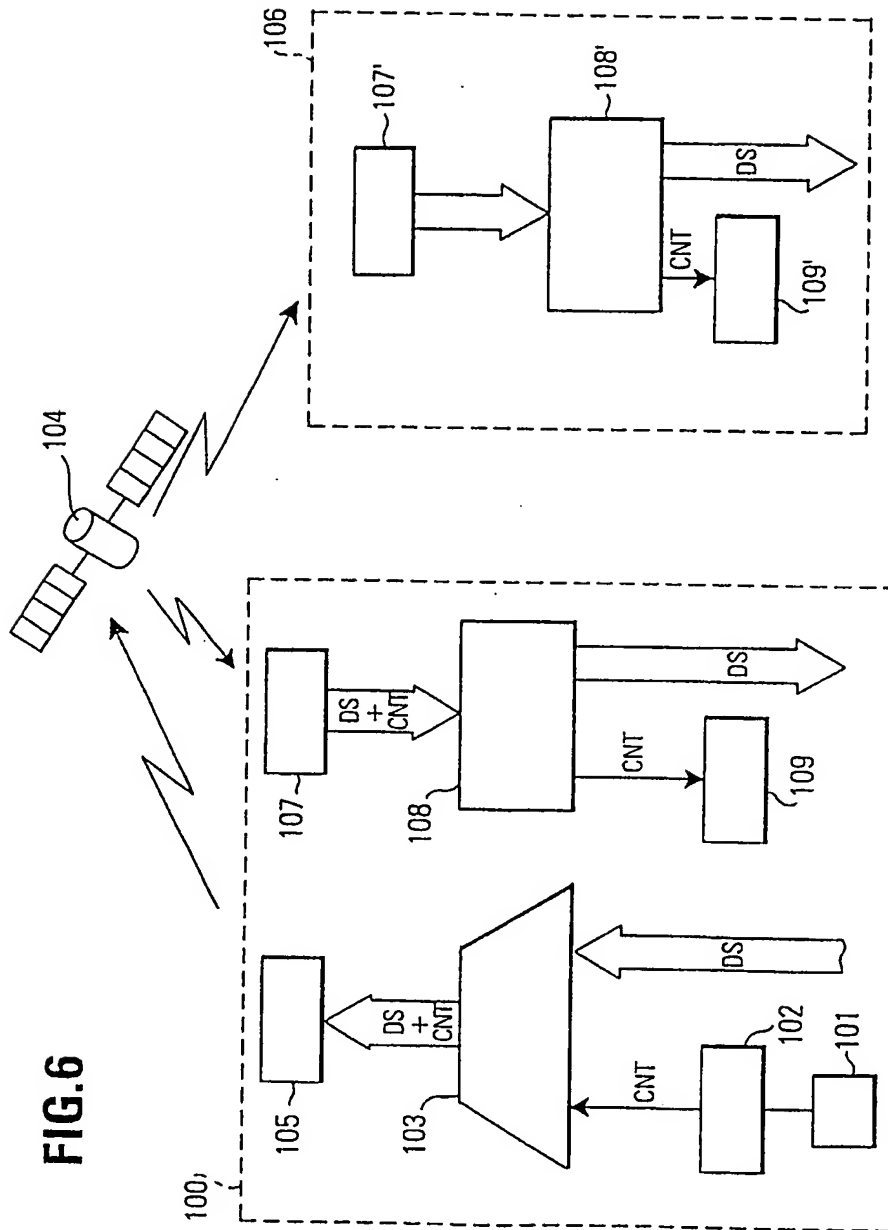

INTERNATIONAL SEARCH REPORT

Int. l. Application No

PCT/EP 00/00990

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01S13/32

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 95 04942 A (INT TELECOMM SATELLITE) 16 February 1995 (1995-02-16) abstract; figure 1 page 8, line 10 -page 9, line 26 -----	1, 12, 28, 33, 37

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

& document member of the same patent family

Date of the actual completion of the international search

19 May 2000

Date of mailing of the international search report

26/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Zaccà, F

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/00990

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9504942 A	16-02-1995	US 5515056 A	07-05-1996
		CA 2145525 A,C	16-02-1995
		CN 1117315 A	21-02-1996
		EP 0664009 A	26-07-1995
		JP 8502592 T	19-03-1996
<hr/>			